

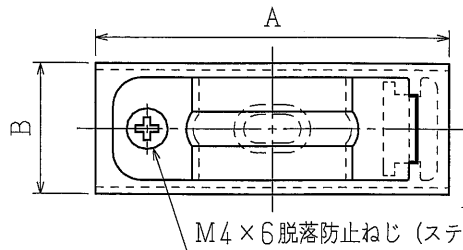


1


2





付属 AYプラグ × 1
プラグボルトM5 (ステンレス品)

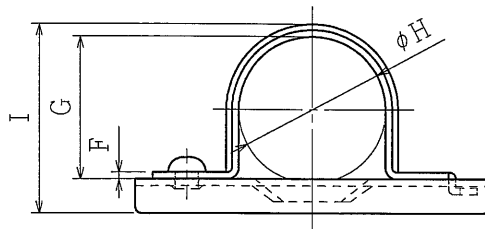

SA-16, 19, 22, 25, 28, 31, 36, 39, V16

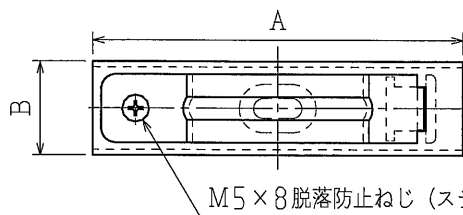

付属 AYプラグ × 1
プラグボルトM6 (ステンレス品)

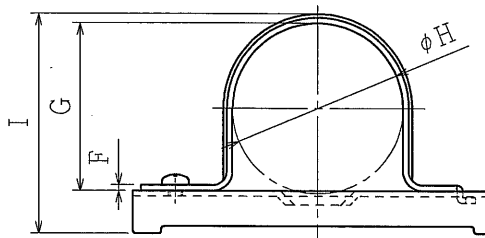


SA-42, 51, 54, 70

サドルエース (ステンレス仕様)

| | 品番 | A | B | C | D | E | F | G | H | I |
|------|---------|-----|----|----|-----|----|-----|------|------|------|
| 薄銅用 | SA-19S | 56 | 23 | 6 | 1.2 | 18 | 1.2 | 18.5 | 19.4 | 26.7 |
| | SA-25S | 62 | 23 | 6 | 1.2 | 18 | 1.2 | 24.6 | 25.7 | 32.8 |
| | SA-31S | 68 | 25 | 6 | 1.2 | 20 | 1.2 | 30.9 | 31.8 | 39.4 |
| | SA-39S | 80 | 25 | 6 | 1.5 | 24 | 1.5 | 37.7 | 38.2 | 46.1 |
| | SA-51S | 120 | 33 | 15 | 2 | 24 | 2 | 49.7 | 50.1 | 68.0 |
| 厚銅用 | SA-16S | 56 | 23 | 6 | 1.2 | 18 | 1.5 | 20.4 | 20.8 | 29.0 |
| | SA-22S | 62 | 23 | 6 | 1.2 | 18 | 1.5 | 26.0 | 27.0 | 34.2 |
| | SA-28S | 68 | 25 | 6 | 1.2 | 20 | 1.5 | 32.3 | 33.9 | 40.9 |
| | SA-36S | 80 | 25 | 6 | 1.5 | 24 | 1.5 | 41.5 | 42.5 | 50.1 |
| | SA-42S | 120 | 33 | 15 | 2 | 24 | 2 | 46.4 | 47.9 | 64.9 |
| | SA-54S | 130 | 33 | 15 | 2 | 24 | 2 | 58.3 | 60.0 | 76.5 |
| | SA-70S | 150 | 33 | 15 | 2 | 24 | 2 | 74.3 | 75.8 | 92.5 |
| VE管用 | SA-V16S | 56 | 23 | 6 | 1.2 | 18 | 1.5 | 21.5 | 22.0 | 30.0 |

| | |
|-------------|-----------|
| 品番 | |
| 材質 | SUS304 |
| 表面処理 又は色 | バレル研磨, 脱脂 |
| 備考 | |

| | | | |
|--|---------------------|---|----|
| 品名 | サドルエース (ステンレス仕様) | | 尺度 |
| 図番 | Z03-1028-A02 | △ | / |
|  日動電工株式会社 | | | |

1

2

A4