







(70, 82除く)

VE14, VE16

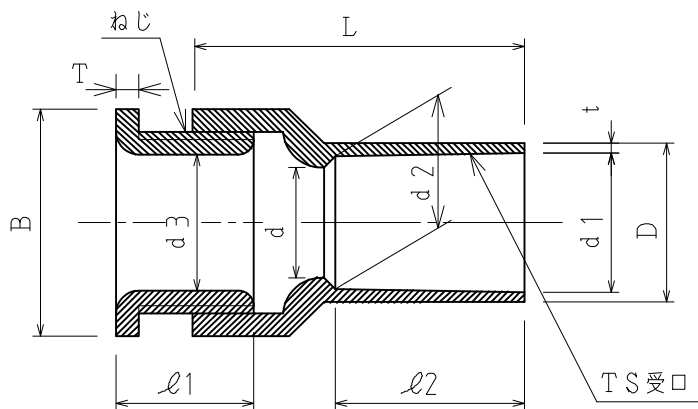

VE22以上

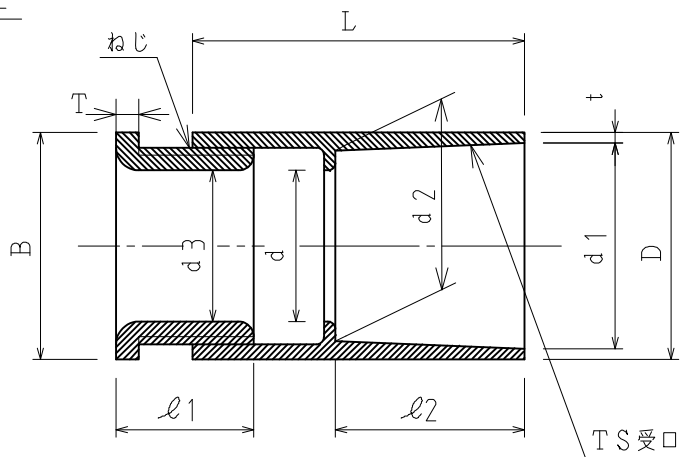

品番											T S 受 口				
グレイ	アイボリー	ホワイト	ダークブルー	呼び	L	B	D	d 3	ℓ 1	T	t	d	d 1	d 2	ℓ 2
2K16GHW	2K16JHW	2K16WHW	2K16DHW	16	50	30	26	20	17	3	1. 8	18	22. 4	21. 6	30
2K22GHW	2K22JHW	2K22WHW	2K22DHW	22	54	30	30	20	17	3	1. 8	22	26. 5	25. 6	35
2K28GHW	2K28JHW	2K28WHW	2K28DHW	28	64	41	40	26	23	4. 5	2. 8	28	34. 6	33. 5	40
2K36GHW	2K36JHW	2K36WHW	2K36DHW	36	68	50	50	34	25	4. 5	3. 7	35	42. 6	41. 4	44
2K42GHW	2K42JHW	2K42WHW	2K42DHW	42	84	57	57	40	31	5	4. 2	40	48. 7	47. 3	55
2K54GHW	2K54JHW	2K54WHW	2K54DHW	54	97	70	70	51	35	4. 5	4. 6	51	60. 8	59. 2	63
2K70GHW	2K70JHW	2K70WHW	2K70DHW	70	110	86	86	67	40	5	4. 6	67	76. 8	75. 2	69
2K82GHW	2K82JHW	2K82WHW	2K82DHW	82	113	101	101	77	44	6	5. 6	77. 2	89. 8	88. 2	72

(単位: mm)



※高耐候性・耐衝撃性樹脂の製品です。

品 番	
材 質	硬質塩化ビニル
表面処理 又は 色	
備 考	J I S C 8 4 3 2

品 名	2号コネクタ 2K	尺度
図 番	W02-1002-A06	△
日動電工株式会社		